


07-03-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**CERTIFICATE OF EXPRESS MAILING**

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on June 30, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **EL615638175US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.



Margaret R. Burdon

PATENT APPLICATION TRANSMITTAL (37 C.F.R. § 1.53(b))

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Sir: This is a request for filing a patent application under 37 C.F.R. § 1.53(b) in the name of inventor:
Evan F. Wies, Dean C. Chang, and Michael P. Ruf

For: **CHAT INTERFACE WITH HAPTIC FEEDBACK FUNCTIONALITY**

Please find enclosed:

- ☒ 25 Page(s) of Specification and Claims,
- ☒ 01 Page of Abstract,
- ☒ 07 Sheet(s) of **informal** Drawings,
- ☒ 2 Pages Combined Declaration and Power of Attorney,
- ☐ Preliminary amendment.
- ☐ Information Disclosure Statement.
- ☐ Verified Statement that this filing is by a small entity.
- ☒ Assignment of the invention to Immersion Corporation.
- ☒ Assignment Recordation Cover Sheet and Assignment recording fee of \$40.00.
- ☐ Other:

The fee has been calculated as shown below.

	Number of Claims	Without Extra Fee	Present Extra	SMALL ENTITY RATE FEE	OR	LARGE ENTITY RATE FEE
FILING FEE				\$395.00	OR	\$690.00
TOTAL CLAIMS	45	-	20	X09 = \$	OR	X18 = \$450.00
INDEP CLAIMS	3	-	3	X39 = \$	OR	X78 = \$0.00
[] Multiple Dependent Claim Present and Fee Not Previously Paid				TOTAL	\$	\$1,140.00



Enclosed are Check Nos. 14417 and 14419 in the amounts of \$40.00 and \$1,140.00, respectively, to cover the assignment recordation fee, and the filing fee and additional claim fee.



If the required fees are missing or any additional fees are required to facilitate filing the enclosed application, please charge such fees or credit any overpayment to Deposit Account No. 50-0384 (Order No. IMM1P104). A copy of this sheet is enclosed.

Date:

6/30/00


James R. Riegel

Registration No. **36,651**

P.O. Box 52037

Palo Alto, CA 94303-0746

Telephone: (408) 467-1900

Attorney Docket No. **IMM1P104**

RECEIVED
JUL 10 2000
FBI - SAN FRANCISCO

CHAT INTERFACE WITH HAPTIC FEEDBACK FUNCTIONALITY

BY INVENTORS

Evan F. Wies

Dean C. Chang

Michael P. Ruf

BACKGROUND OF THE INVENTION

The present invention relates generally to interface devices for allowing humans to interface with computer systems, and more particularly to computer interface devices that provide input from the user to computer systems and implement force feedback to the user.

Using an interface device, a user can interact with an environment displayed by a computer system to perform functions and tasks on the computer, such as playing a game, experiencing a simulation or virtual reality environment, using a computer aided design system, operating a graphical user interface (GUI), or otherwise influencing events or images depicted on the screen. Common human-computer interface devices used for such interaction include a joystick, mouse, trackball, stylus, tablet, pressure-sensitive ball, or the like, that is connected to the computer system controlling the displayed environment. Typically, the computer updates the environment in response to the user's manipulation of a user-manipulatable physical object such as a joystick handle or mouse, and provides visual and audio feedback to the user utilizing the display screen and audio speakers. The computer senses the user's manipulation of the user object through sensors provided on the interface device that send locative signals to the computer.

In some interface devices, haptic feedback is also provided to the user, also known as "force feedback." These types of interface devices can provide physical sensations which are felt by the user manipulating a user manipulable object of the interface device. For example, the Wingman Force joystick or the Wingman Force Feedback Mouse from Logitech Inc. may be connected to a computer and provides forces to a user of the controller. One or more motors or other actuators are used in the device and are connected to the controlling computer system. The computer system controls forces on the joystick in conjunction and coordinated with displayed events and interactions by sending control signals or commands to the actuators. The computer system can thus convey physical force sensations to the user in conjunction with other supplied feedback as the user is grasping or contacting the joystick or other object of the interface device. For example, when the user moves the manipulatable object and causes a displayed cursor to

interact with a different displayed graphical object, the computer can issue a command that causes the actuator to output a force on the user object, conveying a feel sensation to the user.

Force feedback can be used to communicate ideas and messages as well as effects. Forces can in many instances provide additional information to a recipient of the message that may not be apparent in a text or voice message. For example, a text message sent to another user over the Internet may not include information indicating how strong the user feels about the topic expressed or other message subtext. Users can try to express this subtext using well-known icons or symbols known as “emoticons,” which are iconic representations of emotions or messages, such as the “smiley” to indicate a humorous message, expressed as a colon and right parenthesis mark, :), which resembles a face smiling when viewed from the side. Variations of the smiley emoticon can express a variety of other emotions. However, such emoticons and symbols are limited in the complexity of the messages they convey and the range of different messages possible. Haptic feedback, in contrast, can offer much more complex and direct ways to express such subtext to other users in a more compelling fashion.

SUMMARY OF THE INVENTION

5 The present invention is directed to an interface allowing a user to exchange haptic chat messages with other users over a computer network. The user is able to provide messages that cause haptic sensations to one or more remote users which have a haptic interface device, allowing more diverse and compelling messages to be sent in a chat environment.

10 More particularly, one method of the present invention provides a chat interface displayed by a local computer, the chat interface capable of providing haptic messages to other users across a network. The chat interface is displayed on a display device of the local computer, and input data from a user of the local computer is received at the chat interface, the input data providing an outgoing chat message which can include sent force information. The outgoing chat message to be sent to a remote computer that is connected to the local host computer via a computer network, and the remote computer can display a chat interface and output a haptic sensation to a user of the remote computer based at least in part on the force information. An incoming message from the remote computer is received at the chat interface, which may also include received force information. The incoming chat message is displayed on a display device to the user of the local computer. A haptic sensation can be output to the user of the local computer using a haptic device coupled to the local computer, where the haptic sensation is based at least in part on the received force information received from the remote computer.

15 The local computer and remote computer can each be coupled to a server machine via the network, such as an IRC server, or can be coupled to each other via a peer-to-peer connection. The chat interface preferably includes multiple available haptic effects, each selectable by the user to be sent as the force information in the chat message. The chat interface also may allow the user to create a custom haptic sensation to be referenced by the force information sent to the remote computer. The force information is also preferably associated with sound information, such that the remote computer outputs a sound effect in coordination with the output of the haptic sensation. In one embodiment, the received force (or other) information can be processed by a background application running on the local computer simultaneously with the chat interface, the background application controlling the output of the haptic sensation to the user.

30 The sent force information may include a network address, which is then used by the chat interface on the remote computer as a network location at which to retrieve additional force information required to output a force sensation to the haptic device at the remote computer. For example, the network address can be an address of a web server storing a library of standard and

customized haptic sensations which can be output by the haptic device. In addition, custom force information can be uploaded from a client machine to a server at the network address, where the uploaded custom force information can be downloaded by a different client computer to output a haptic sensation based on the custom force information. The force information in the chat message can alternatively includes data characterizing the desired haptic sensation. Preferably, the chat interface allows the user of the local computer to type a text command including text characters to be sent as a force command or cause force information to be sent to the remote computer. The text force command is preferably displayed in a chat interface of the remote computer and includes at least one delimiter character for indicating the nature of the text force command or can be a predetermined character(s), such as those used for emoticons. Chat messages can also be in audio or other formats, and one embodiment allows audio waveforms in chat messages to be analyzed to base haptic sensations on waveform content.

The present invention advantageously provides features in a chat interface on a computer to allow enhancements to chat messages using haptic sensations. The user can select a desired haptic sensation or even customize a haptic sensation to provide with a message to one or more other users in a chat session. The haptic sensations allow a wide variety of emotions and other content and subtext of messages to be conveyed, allowing a user more freedom to express a desired message across a computer network.

These and other advantages of the present invention will become apparent to those skilled in the art upon a reading of the following specification of the invention and a study of the several figures of the drawing.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a block diagram illustrating a haptic system suitable for use as a client computer in the present invention;

5 FIGURE 2 is a block diagram illustrating a network configuration suitable for use with the present invention;

FIGURE 3a is a screen display of one embodiment of a chat interface of the present invention allowing haptic messages to be sent and received;

10 FIGURE 3b is a screen display of the chat interface of Fig. 3a in which a haptic effect is selected to be sent as a haptic message;

FIGURE 3c is a screen display of an input screen of the chat interface of Fig. 3a to allow the user to specify information about a custom haptic effect;

FIGURE 3d is a screen display of a selection screen of the chat interface of Fig. 3a to allow a user to retrieve and test a haptic effect from a list stored on a different server; and

15 FIGURE 4 is a screen display of another embodiment of the chat interface of Fig. 3b including buttons used to send haptic messages.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

FIGURE 1 is a block diagram illustrating a force feedback interface system 10 for use with the present invention controlled by a host computer system. Interface system 10 includes a host computer system 12 and an interface device 14.

Host computer system 12 is preferably a personal computer, such as an IBM-compatible or Macintosh personal computer, or a workstation, such as a SUN or Silicon Graphics workstation. Alternatively, host computer system 12 can be one of a variety of home video game systems, such as systems available from Nintendo, Sega, or Sony, a television "set top box" or a "network computer", etc. Host computer system 12 preferably implements a host application program with which a user 22 is interacting via peripherals and interface device 14. For example, the host application program can be a video game, medical simulation, scientific analysis program, operating system, graphical user interface, or other application program that utilizes force feedback. Typically, the host application provides images to be displayed on a display output device, as described below, and/or other feedback, such as auditory signals.

Host computer system 12 preferably includes a host microprocessor 16, random access memory (RAM) 17, read-only memory (ROM) 19, input/output (I/O) electronics 21, a clock 18, a display screen 20, and an audio output device 21. Display screen 20 can be used to display images generated by host computer system 12 or other computer systems, and can be a standard display screen, CRT, flat-panel display, 3-D goggles, or any other visual interface. Audio output device 21, such as speakers, is preferably coupled to host microprocessor 16 via amplifiers, filters, and other circuitry well known to those skilled in the art (e.g. in a sound card) and provides sound output to user 22 from the host computer 18. Other types of peripherals can also be coupled to host processor 16, such as storage devices (hard disk drive, CD ROM/DVD-ROM drive, floppy disk drive, etc.), printers, and other input and output devices. Data for implementing the interfaces of the present invention can be stored on computer readable media such as memory (RAM or ROM), a hard disk, a CD-ROM or DVD-ROM, etc.

An interface device 14 is coupled to host computer system 12 by a bi-directional bus 24. The bi-directional bus sends signals in either direction between host computer system 12 and the interface device. An interface port of host computer system 12, such as an RS232 or Universal Serial Bus (USB) serial interface port, parallel port, game port, etc., connects bus 24 to host computer system 12.

Interface device 14 includes a local microprocessor 26, local memory 27, sensors 28, actuators 30, a user object 34, optional sensor interface 36, an optional actuator interface 38, and

other optional input devices 39. Local microprocessor 26 is coupled to bus 24 and is considered local to interface device 14 and is dedicated to force feedback and sensor I/O of interface device 14. Microprocessor 26 can be provided with software instructions to wait for commands or requests from computer host 12, decode the command or request, and handle/control input and output signals according to the command or request. In addition, processor 26 preferably operates independently of host computer 16 by reading sensor signals and calculating appropriate forces from those sensor signals, time signals, and stored or relayed instructions selected in accordance with a host command. Suitable microprocessors for use as local microprocessor 26 include the MC68HC711E9 by Motorola, the PIC16C74 by Microchip, and the 82930AX by Intel Corp., for example. Microprocessor 26 can include one microprocessor chip, or multiple processors and/or co-processor chips, and/or digital signal processor (DSP) capability.

Microprocessor 26 can receive signals from sensors 28 and provide signals to actuators 30 of the interface device 14 in accordance with instructions provided by host computer 12 over bus 24. For example, in a preferred local control embodiment, host computer system 12 provides high level supervisory commands to microprocessor 26 over bus 24, and microprocessor 26 manages low level force control loops to sensors and actuators in accordance with the high level commands and independently of the host computer 18. The force feedback system thus provides a host control loop of information and a local control loop of information in a distributed control system. This operation is described in greater detail in U.S. Patent No. 5,739,811 and patent application serial nos. 08/877,114 and 08/050,665 (which is a continuation of U.S. Patent No. 5,734,373), all incorporated by reference herein. Microprocessor 26 can also receive commands from any other input devices 39 included on interface apparatus 14, such as buttons, and provides appropriate signals to host computer 12 to indicate that the input information has been received and any information included in the input information. Local memory 27, such as RAM and/or ROM, is preferably coupled to microprocessor 26 in interface device 14 to store instructions for microprocessor 26 and store temporary and other data. In addition, a local clock 29 can be coupled to the microprocessor 26 to provide timing data.

Sensors 28 sense the position, motion, and/or other characteristics of a user object 34 of the interface device 14 along one or more degrees of freedom and provide signals to microprocessor 26 including information representative of those characteristics. Rotary or linear optical encoders, potentiometers, optical sensors, velocity sensors, acceleration sensors, strain gauge, or other types of sensors can be used. Sensors 28 provide an electrical signal to an optional sensor interface 36, which can be used to convert sensor signals to signals that can be interpreted by the microprocessor 26 and/or host computer system 12.

Actuators 30 transmit forces to user object 34 of the interface device 14 in one or more directions along one or more degrees of freedom, and/or may apply forces to the housing of the device 14, in response to signals received from microprocessor 26. Actuators 30 can include two types: active actuators and passive actuators. Active actuators include linear current control motors, stepper motors, pneumatic/hydraulic active actuators, a torquer (motor with limited angular range), a voice coil actuators, and other types of actuators that transmit a force to move an object. Passive actuators can also be used for actuators 30, such as magnetic particle brakes, friction brakes, or pneumatic/hydraulic passive actuators. Actuator interface 38 can be optionally connected between actuators 30 and microprocessor 26 to convert signals from microprocessor 26 into signals appropriate to drive actuators 30.

Other input devices 39 can optionally be included in interface device 14 and send input signals to microprocessor 26 or to host processor 16. Such input devices can include buttons, dials, switches, levers, or other mechanisms. For example, in embodiments where user object 34 is a joystick, other input devices can include one or more buttons provided, for example, on the joystick handle or base. Power supply 40 can optionally be coupled to actuator interface 38 and/or actuators 30 to provide electrical power. A safety switch 41 is optionally included in interface device 14 to provide a mechanism to deactivate actuators 30 for safety reasons.

User manipulable object 34 ("user object") is a physical object, device or article that may be grasped or otherwise contacted or controlled by a user and which is coupled to interface device 14. By "grasp", it is meant that users may physically contact the object in some fashion, such as by hand, with their fingertips, or even orally in the case of handicapped persons. The user 22 can manipulate or move the object to interface with the host application program the user is viewing on display screen 20. Object 34 can be a joystick, mouse, trackball, keyboard, stylus (e.g. at the end of a linkage), steering wheel, sphere, medical instrument (laparoscope, catheter, etc.), pool cue (e.g. moving the cue through actuated rollers), hand grip, knob, button, or other article.

The haptic feedback interface device 14 can take a variety of forms, including a mouse, joystick, gamepad, steering wheel, chair pads which the user sits on, fishing rod, pool cue, etc. A variety of these types of devices are available commercially. For example, suitable mice for use with the present invention include kinesthetic force and vibrotactile mice, such as those described in copending U.S. application nos. 08/965,720, 09/125,711, 09/456,887, and 60/182,868, all incorporated herein by reference. The user object 34 and/or interface device 14 can also be a keyboard having haptic feedback functionality; some embodiments of such a keyboard are described in copending application no. 09/____, filed on May 12, 2000, and entitled, "Haptic Feedback Using a Keyboard Device," which is incorporated herein by reference. One preferred

embodiment of a system for use with the present invention is a haptic keyboard and a haptic mouse, where the user may type messages on the haptic keyboard in the chat interface of the present invention, and may use the haptic mouse to move a cursor to select functions within the chat interface. Both devices can output the haptic feedback communicated in the present invention. Thus, when using both devices, the user can experience the haptic feedback at all times, whether the user has one hand on the keyboard and one hand on the mouse, both hands on the keyboard or one hand on the mouse, or no hands on the keyboard and one hand on the mouse.

Haptic Feedback Chat Interface

FIGURE 2 is a block diagram illustrating a computer networking structure 60 suitable for use with the present invention. A chat server machine 70 can be provided which can implement a chat communication program and/or protocol, such as IRC, as is well known to those of skill in the art. The server can be available over the Internet and/or World Wide Web, for example, or on a LAN, WAN, or other network (including a wireless network, device network, telephone network, etc.). Client machines 72a and 72b can connect to and communicate with the server over the network. Each client machine 72 is coupled to a haptic device 74 that outputs haptic sensations to the user as detailed above and which is physically contacted and operated by the user of the client machine. The client machines 72a, 72b and 73 can connect to the server, and through the server the client machines can establish a connection with each other. In a chat, the user of each client machine sends data to one or more of the other client machines, where it is read and sensed by the other user. The chat server 70 can be used merely as a way for two client machines to find each other and connect, so that communication between client machines is thereafter only between themselves; or, the chat server 70 can continue to receive and route data between the clients. In other embodiments, client machines can directly connect to each other in a peer-to-peer connection, without the use of a separate server machine, over various types of networks, connections, and channels. The term "network," as used herein, is intended to refer to all such communication connections.

In the described implementation, clients 72a and 72b each include a chat client functional portion 76 and a haptic control functional portion 78. The chat client 76 interacts with the chat server 70 according to standard protocols to provide chat communications to the user of the client machine from other client machines. For example, server 70 can be an IRC (Internet Relay Chat) server which communicates with clients using well-known IRC protocols. Other types chat protocols that can be used include pure HTML-based chat protocols, Java-based chat protocols, or protocols based in other standards. Some clients connected to server 70 and

participating in chat sessions, such as client 73, may only be implementing the chat client portion 76 and thus ignore the haptic implementation of haptic messages.

The haptic control portion 78 interacts with the chat client portion 76 to provide control over haptic sensations of the present invention that are associated with chat messages. For example, received messages which are interpreted as haptic messages or commands can be detected by the haptic control portion 76 and haptic sensations can be commanded from portion 78 to the haptic device 74. Furthermore, in some embodiments, the haptic control portion 78 can communicate with one or more other servers, such as web server 80. For example, force effect data, sound data, or other data can be retrieved by the haptic control portion 78 to implement particular haptic sensations. This operation is described in greater detail below.

FIGURE 3a is a diagram of display screen 20 of host computer 12 showing a displayed interface 100 illustrating one example of a chat interface for a network chat application program of the present invention. A network chat program allows two or more people at different computers or terminals to communicate with each other over a computer network, as is well known to those skilled in the art. In some embodiments, a single person can interact with a "simulated person" or entity in a chat-like communication, such as with a AI game character or player implemented by a program running on a server, which can also make use of the present invention. In different embodiments, messages in different formats can be sent, such as in text, sound, images, or a combination of these. The chat interface of the present invention also allows haptic sensations to be sent from one user to one or more other users across the network based on the message desired to be sent. Some methods for providing haptic feedback over a network are described in U.S. Patent No. 6,028,593 and U.S. patent Application No. 09/153,781, both incorporated herein by reference. The network can be a local area network (LAN), wide area network (WAN), the Internet, or other network.

Display screen 20 is shown displaying a chat interface 100 of the present invention. The interface 100 can implement and connect to a server running a standard chat program and protocol, such as Internet Relay Chat (IRC), using methods well known to those skilled in the art. IRC simply provides text characters from one client to the chat server 70, which routes the text characters to the other clients participating in the chat session. In some embodiments, the chat protocol used can be a proprietary one that only functions with particular programs.

In the described embodiment, a chat client program handles all the standard chat interfacing, while a haptic functionality program interfaces with the chat program to handle the output of haptic sensations. For example, the chat interface 100 can be displayed within a web browser program, such as Microsoft Internet Explorer or Netscape Navigator, as a web page. For example, in one implementation, the Internet Explorer web browser can make use of the MS

Chat ActiveX Control available from Microsoft Corp., which can perform all the functions necessary to communicate with an IRC server and the necessary network protocols; this can be the chat client portion 76 as shown in Fig. 2. The ActiveX Control can generate events, such as when message data is received, to allow other programs to act upon those events. The haptic control portion 78 can be running alongside the chat ActiveX Control and can receive the events from the control. When an event occurs, the haptic control portion can check the input for specific haptic commands or messages and generate commands to cause haptic sensations for the user if appropriate.

Alternatively, the chat interface 100 can be implemented as a separate application program, as a functional part of another program or operating system, a Java applet or other program implemented over the World Wide Web or Internet, or other implementation. Similar embodiments used for force feedback in web pages sent over the World Wide Web are described in copending application no. 09/244,622, incorporated herein by reference. For example, in one embodiment the haptic chat interface can be a portion of an "instant messaging" program such as ICQ or AOL Instant Messenger, available from America Online, Inc., which allows users to chat using text, send files to each other, connect to each other using a game program, etc. In a different embodiment, a background application, which is always running on the client computer, checks all input being sent and/or received and determines if any of the input qualifies as a haptic message, e.g. if any input has the brackets surround text characters as described below. Thus, a standard chat interface program can be used for providing chat functionality, with the background application enabling the haptic sensations for haptic messages. If such a background application is used, particular application programs, such as chat programs and instant messaging programs, can be designated by the user to be monitored by the background application, so that the background application ignores input and output of other programs not relevant to haptic messaging. A background application used for force feedback functionality in a graphical user interface, which can also be applied to the chat interface of the present invention, is described in copending U.S. Patent Application No. 08/970,953, incorporated herein by reference.

In still other embodiments, the interface 100 can portray a 2-D or 3-D graphical environment through which the user can navigate and manipulate. For example, in a virtual or game environment implemented over the Internet or other network (e.g., using VRML protocols), a message can be sent to another 3-D character or avatar, and a haptic component to the message can be provided for the recipient.

Interface 100 includes information fields 102, chat window 104, a user list window 106, and effects window 108. Information fields 102 allow the user to specify connection and naming options. A server name field 112 allows the user to specify a particular server to which to

connect. For example, the described implementation allows the user to connect to IRC servers. Alternatively, this can be a client name to connect directly to another client machine, if such functionality is provided in the chat interface. Nickname field 114 allows the user to specify a name that is used within a chat. Room name field 116 allows the user to specify a “chat room” or particular area on the specified server in which the chat is held which allows only the users designated to be in that chat room to communicate with each other in the chat session. The “leave” button 118, when selected by the user (e.g. with keyboard or mouse cursor), causes the user to leave any chat session in which the user is currently participating. Attributes 120 allow the user to designate whether the user will feel the haptic sensations associated with an effect from window 108 when such an effect is received from another user, and/or hear the sound effect associated with that haptic message when it is received (or, in some embodiments, when the haptic or sound effect is sent by the user, to allow the user to haptically and auditorily experience a message in the way that the recipient of the message will experience it). Icon attributes 122 allow the user to designate whether the user will feel the haptic sensations and/or the sound effects associated with “icons” (emoticons) received from a different user, i.e. messages having haptic and auditory content when used in the present invention, each message represented by a single command or icon. For example, a smiley icon (“:)”) can, when received, cause a predefined force sensation and sound to be output to the user if attributes 122 are selected. The user can therefore select whether he or she wants to experience the haptic and/or auditory content of iconic messages received in the chat interface 100.

Chat window 104 displays the text messages typed in (or otherwise input) by the user as well as messages sent from other users that are currently connected to the user’s computer in a chat session. The user can type in a text message in the text entry field 126, can send the message to all the users in the chat session by selecting button 128, or can “whisper” the message only to users selected in window 106 by selecting the button 130. In other implementations, each of the users in the chat session may display messages in a separate window or other area of the interface 100 dedicated to that user. User list window 106 displays all the users currently in the chat room or session in which the user is participating or observing (e.g., in a chat room which the user wishes to observe without sending messages of his or her own). The users participating in the chat room are able to type messages to the other users in the chat room, where those messages are displayed in the chat window 104. In some embodiments, a user is able to select one or more names of users displayed in window 106 to call up information about those users and/or send messages directly to those users. In the preferred embodiment, the user can select one or more names and send tactile messages to the selected users.

Effects list 108 provides a number of force effects that can be sent as haptic messages to a particular users selected in the user list window 106 (or to all users if no users in list 106 are

selected). Each of the effects listed in list 108 also has one or more sounds associated with it which are played by the recipient's client machine when the haptic message is sent. Effects list 108 preferably includes all the haptic messages which the user can send, including any custom or newly-downloaded messages. The messages are only sent to the selected user(s), so that other
5 unselected users are not sent the messages. Each name in list 108 represents a particular haptic sensation that has been associated with that name or label in list 108. To send a haptic message, the user can select one of the effects in list 108 with a displayed cursor or by using some other selection method (keyboard, etc.). This preferably calls up a menu to allow the user to perform different functions with the selected effect, as detailed below with respect to Fig. 3b. The list
10 108 preferably can be scrolled or otherwise navigated if it includes too many entries to be displayed all at one time.

FIGURE 3b shows the displayed interface 100 of Fig. 3a, where the user has selected one of the effects in list 108 to display an options menu 140. For example, the user can use a mouse or other pointing device to move the cursor on the desired effect and push a particular mouse
15 button to bring up the menu 140. Menu 140 includes a number of options, including a send command 142, a whisper command 144, a play command 146, a compose new effect command 148, and an import effect command 150. The user may select any of these commands.

The interface 100 of Fig. 3b shows the send command 142 selected. This command will cause the selected effect in list 108 to be sent to the all users participating in the chat, i.e. users in the chat room. For example, the "laugh" effect shown selected in Fig. 3b is sent to all participants in the chat session. In the described embodiment, this is implemented by sending text characters that are designated or delimited as a haptic command by other text characters. For example, characters that are surround by brackets < and > can be interpreted as haptic commands
20 by the haptic control portion of the interface 100. Thus, the command <laugh> is sent to the other clients when the "laugh" effect is sent using the menu 140. Preferably, the command label generally signifies in natural language the haptic sensation with which it is associated; e.g., the command "slap" signifies a high magnitude jolt, while the command "wink" may signify a lower magnitude sensation.

The haptic control portion of the recipient user's client detects the received command and
30 outputs a force sensation with the same name to the haptic device. Thus, for example, when the effect "pat" is selected (or the command <pat> is entered), an associated haptic message is sent to other chat user(s). The recipient user(s) then feel the haptic message via a haptic feedback interface device that the recipient user is using. The haptic message is delivered to the recipient user as a haptic sensation output by the recipient user's haptic interface device, e.g. a pulse, vibration, jolt, etc. or combination of multiple haptic sensations. Each of the effects in list 108
35

preferably has a name or label that is appropriate to the haptic sensation associated with that name. For example, the "pat" effect preferably provides a haptic message implementing a small, smooth jolt to the grip or user object of the recipient user's haptic device, like a pat of a hand. The "giggle" effect can provide a low-frequency vibration, the "slap" effect can provide a sharp, high magnitude jolt, the "smile" effect can provide a slow side-to-side motion, etc.

Also, a predefined sound effect is also preferably associated with the sent message to more effectively convey the message, although such sound need not be played in alternate embodiments. The sound effect is synchronized with features of the haptic sensation of the haptic message. For example, the message "slap" can provide a single haptic jolt and sound effect, while the message "slap-slap" can provide two successive jolts, each jolt synchronized with appropriate slapping sound effects. A sound file (which can be in a standardized format such as .wav) can be associated with the haptic command on the recipient client machine, and this sound file is played concurrently with the output of the force sensation. In other embodiments, other types of media data can be output synchronized with the haptic effect instead of or in addition to the sound effect. For example, animated or static graphics or images can be displayed on a display screen in coordination with the output of the haptic effect and with the sound effect. These other types of data can be stored in files and accessed similar to the sound files described above.

A chat user can also preferably send a haptic message by typing a text command in the chat window directly with a keyboard (or inputting the command with another input device) rather than selecting an effect from the list 108. For example, the user could simply type "<slapslap>" to cause the appropriate haptic message to be sent. Furthermore, predefined "emoticons" can be defined to be associated with haptic and sound effects and can be sent as haptic commands. For example, a smiley emoticon, ":)", when typed into entry field 126 and sent to another user, can cause the same haptic sensation as a "smile" effect selected from effects list 108, or can cause a unique associated haptic sensation to be output to the recipient. Other examples of emoticons include ": (" (frown), ";)" (wink), and ": o" (surprise). In some embodiments, to be used as haptic messages, such emoticons are placed between brackets to indicate that they are haptic commands. Other embodiments can automatically interpret such emoticons as commands, without brackets or other command characters or delimiters. Emoticons can preferably be predefined by a user in a separate list, where each emoticon can be associated with haptic effects and sound effects similarly to the custom effects described below.

In the described embodiment, the command sent to the recipient clients as a haptic message is also displayed in the recipients' chat window 104 (and the sender's window 104, if desired) as the text characters in the message. Thus, a "smile" haptic message 124 is displayed in

Fig. 3b which caused a haptic sensation and associated sound to be output on the recipient's client machine. The displayed message 124 indicates visually to the user that a haptic message has been sent.

In some embodiments, the user can send a normal text message as well as a haptic effect and sound effect, all simultaneously. For example, the user can type in a message in field 126 and can select an option (not shown) in menu 140 such as "send with text message", which will cause the selected haptic effect (and associated sound effect) to be simultaneously sent with the text message in field 126 to recipient users. Thus, the term "haptic message" as referenced herein can include a haptic effect as well as a sound effect, a text message, and/or other content.

The whisper command 144 in menu 140, when selected, causes the selected haptic effect(s) from list 108 to be sent only to those users selected in window 106, but is otherwise similar to the send command 142. The play command 146 allows the selected haptic effect(s), and their associated sounds, to be output on the user's own client machine so that the user can check how the haptic message will be experienced by recipient users.

The actual haptic message contents that are sent to the recipient client machine(s) can vary in different embodiments. In the described embodiment, the available haptic messages from list 108 are identical for all users in the chat, who are all using the same interface 100. Thus, the only information that needs to be sent to other users in a haptic message is the high level command indicating the type of haptic sensation is being sent as a message, such as the text label of the effect surround by brackets explained above, or some other type of command. This allows the chat interface of the recipient client machine to receive the command as standard text characters or other standardized data, and allows the haptic control portion of the recipient client machine to know which haptic sensation should be output. It should be noted that in some embodiments, a haptic message can be sent without the sending client knowing that it is a haptic message. For example, as explained above, an emoticon without any other special characters can be sent by a non-force feedback standard client in a chat session as a text message, and the emoticon can be considered a haptic message by the receiving client so that a haptic sensation associated with the emoticon is output upon reception. Such an implementation can be considered a "generic" haptic effect that is implemented only at the receiving client.

In other embodiments, more sophisticated haptic messages can be sent or indicated. For example, the haptic message can include force information content and/or additional commands that are sent to the recipient user's client machine and instruct the haptic device of the recipient user to output a haptic sensation. This can allow for customized haptic sensations to be output that are not previously defined within the interface 100. The force information can be provided in several different ways. For example, the force information can be sent as a high level

command that indicates a standardized type of haptic sensation to output, where it is assumed that the recipient users all have a standardized library of haptic sensations available on their computer systems which the high level command can reference. In some embodiments, additional information can be sent, such as one or more command parameters that characterize the commanded haptic sensation, e.g., time duration of the sensation, frequency, magnitude, direction, button parameters, rise time and decay time, simulated mass or position, etc. In yet other embodiments, data describing and defining the actual haptic sensation can be sent over, such as a series of force magnitudes and directions. Or, a network address (or other location) can be sent at which the haptic sensation data can be downloaded or retrieved. Many of these methods can allow completely customized haptic sensations to be sent which recipient users do not already have. For example, the first time a customized haptic message is sent, all the data required to implement the haptic sensation is also sent. Any description data need not be sent thereafter when that haptic message is sent successive later times, since the haptic description data is already resident and saved on the recipient computer system. Such sending of description data is obviously more suitable for communication over faster, broadband networks and connections due to the larger amount of data sent.

Custom haptic effects and sound effects can also be composed by users. For example, if the user selects the Compose New Effect command 148 from menu 140, the user preferably accesses a user interface to allow effect creation. One example of such a user interface is shown in FIGURE 3c. A dialog box 160 is displayed when the user has selected command 148. The user can enter information into fields of the dialog box to define a custom haptic effect and sound effect. For example, a name or label for the haptic message can be specified in field 162, a network address or local address for the location of the haptic effect associated with the label (where the data can be organized in a file having a standardized format, such as an ".IFR" file) can be specified in a field 164, the name of the haptic effect file at the address of field 164 can be specified in field 166, and the network or local address of sound data, such as a sound file, can be specified in field 168. Once the user has entered this data to create a new haptic message, the name of field 162 is displayed in the list 108 of the chat interface 100 and can be selected similarly to the other listed effects.

In some embodiments, libraries of standardized as well as customized haptic effects and sound effects can be stored on network servers available on a network having wide distribution, such as the Internet, which recipient users can access to download the needed data to experience received haptic messages. In the described embodiment, web server 80 (shown in Fig. 2) can be accessed by the haptic control portion of the chat program of the present invention (e.g. by using a URL address and CGI script) to download needed haptic effects and/or data, as well as sound data. For example, a sending user can create a custom haptic effect on his or her client machine

using the interface of Fig. 3c. At the time of effect creation, or when the creating user enters a chat room, or if/when that user so chooses, the custom haptic effect is uploaded to the web server 80 to be stored and made available to other clients accessing the network. Other users on different client machines, when entering the chat room or after the time when the custom effect has been uploaded, can automatically download the custom haptic effect from the web server 80, or can download the custom effect when the user of that machine so chooses. For example, upon entering a chat session, the chat interface on each client machine can check which haptic effects are needed for the chat session; this can be accomplished by maintaining a continuously-updated "chat room list" of effects on the web server, which includes all effects which could be sent from any of the client machines in the chat room. A particular chat interface can check that list upon entry into the chat session, and then download the effects in the list not currently stored on that client machine. Alternatively, when a haptic message referencing the custom effect is sent to a client machine, the recipient client machine can download the data for that effect at the time of reception of the haptic message.

The chat interface 100 (or other separate program or web page) can include features to allow users to connect to a server that lists customized haptic sensations available from multiple other users that have chosen to make their sensations available, and which allows users to connect to various other user client machines or servers to download selected haptic sensation files and data. For example, if the user selects the Import Effect command 150 of the menu 148, the user can preferably import any of several available effects. An example of an interface to allow such selection is shown in FIGURE 3d. Window 170 shows a library list stored on a web server (or other server) that includes a number of categories and subcategories 172 of effects available on the server. In each category or subcategory 172, a number of effects 174 can be listed which are stored on the server. Effects which are not currently stored on the client machine displaying the interface 100 can be designated or marked as such. The user can select an effect 174 and then select the retrieve button 176 to download the selected effect to the local client machine. The user can also select the play button 178 to play a selected, retrieved effect 174, allowing the user to experience how the effect feels. If the user selects the import button 180, a selected effect is added to and displayed in the list 108 of effects (and downloaded if necessary) and can be sent by the user as a haptic message, as well as played when the user receives a haptic message including that haptic effect. Any sound effects associated with the retrieved haptic effect are also preferably downloaded.

The effects can be categorized on the server according to a number of different criteria. For example, groups of haptic messages can be displayed and organized according to types of messages, emotion of the message, strength of the message, etc. For example, a "sad messages" category can include all those haptic messages conveying such an emotional state, and a

“romance” category can include haptic messages conveying an appropriate close, personal message.

In other embodiments, the chat interface can be part of a voice communication program allowing voice communication or telephony over the computer network 60. Voice communication features can be found in existing utility programs or in API's such as DirectX. For example, when saying something to a recipient user, a sending user can select a message effect similar to an effect in list 108 to provide a haptic sensation to the recipient user in conjunction with the spoken message, or independent of any speech. Haptic messages can also be selected to be sent to a recipient user based on spoken message occurrences or content; for example, a haptic message can be sent each time a word is spoken. If voice recognition is implemented on the client machine (e.g., using standard available voice recognition software), a haptic message can be based on a software interpretation of the actual spoken message content. Thus, if the user says, “I hate you” to another user, a “slap” or “punch” message can automatically be sent with or right after the voice message to provide the appropriate haptic sensation.

A haptic message can be “generic,” i.e. the haptic output can be generated on the receiving machine based on user preferences, where the user can associate desired haptic sensations with particular commands that are received in an appropriate interface. Alternatively, a haptic message can be “authored”, where the sending user defines how the haptic sensation is to be felt within the message, by pointing to standardized haptic sensations or providing the data necessary to implement the authored haptic sensation. Such generic and authored implementations are similar to generic and authored force effects sent over networks as described in copending U.S. application no. 09/244,622.

In another embodiment, haptic sensations can be based on audio speech that is input and transmitted as chat messages to be output by the other client machines in the chat session. In one such embodiment, a process can be running on the receiving client computer which analyzes incoming audio speech data and commands haptic sensations based on the speech data. For example, in a simple embodiment, a wave pattern representing the speech data can be converted to haptic sensations based on the shape of the waveform, where each (or a selected) peak in the waveform can cause the output of a pulse or jolt on the haptic device, and repeating peaks in the waveform can cause a vibration. Other features of waveforms can be designated for other haptic effects, e.g., jumps in amplitude by a predetermined amount can cause a jolt or pulse, or the jolt's magnitude can be proportional to the jump in amplitude of the waveform.

In a more complex embodiment, the speech waveforms of the received message can be analyzed for predetermined, particular characteristics which may indicate the emotional content

of the audio chat message, and a haptic sensation appropriate to the emotional content can then be output to the user. For example, a laugh of the sending user might provide distinguishing characteristics in the sent waveform, such as a high frequency, high amplitude oscillation. If such a laugh is detected, a haptic sensation such as an oscillation or wiggling of the mouse (or other user manipulandum) can be output. A shout from the sending user might appear in the waveform as a quick transition from low amplitude to high amplitude, and the associated haptic sensation can be a quick, high frequency vibration or pulse. A sigh from the sending user may cause a long, low frequency, low volume, consistent pitch or amplitude in the waveform, which can be associated with gentle, circular motions of the manipulandum or low frequency vibrations on the haptic device. Other emotions or inherent messages can be similarly analyzed in received waveforms and appropriate haptic sensations output based on the analysis.

FIGURE 4 illustrates a slightly different embodiment 100' of a chat interface, similar to the chat interface 100 shown in Fig. 3a. Interface 100' is different from interface 100 in that several haptic message buttons are provided instead of the list 108 of effects. Whisper haptic message buttons 210 are used to send haptic and auditory messages to particular users selected in the user list window 106. The messages are only sent to users selected in the window 106. Each button 210 represents a particular haptic sensation that has been associated with the name of the button, similar to an effect listed in list 108 described above. To send a haptic message, the user merely selects one of the buttons 210 with a displayed cursor or by using some other selection method (keyboard, voice, etc.). Thus, when the button "pat" is selected, an associated haptic message is sent to the selected user(s). The selected user(s) then feel the haptic message via a haptic feedback interface device that the selected user is using. General haptic sensation message buttons 212 are similar to whisper buttons 210, except that the haptic message designated by the button label is sent to all users in the chat session instead of selected users.

While this invention has been described in terms of several preferred embodiments, it is contemplated that alterations, permutations and equivalents thereof will become apparent to those skilled in the art upon a reading of the specification and study of the drawings. For example, many different application programs can use the messaging functions of the present invention, including game programs, virtual reality programs and environments, teleconferencing applications for business meetings, telephone-type voice communications over computer networks or other communication channels, etc. Furthermore, certain terminology has been used for the purposes of descriptive clarity, and not to limit the present invention. It is therefore intended that the following appended claims include all such alterations, permutations, and equivalents as fall within the true spirit and scope of the present invention.

What is claimed is:

CLAIMS

1. A method for providing a chat interface displayed by a local computer, the chat
5 interface capable of providing haptic messages to other users in a chat session, the method comprising:

causing a display of said chat interface on a display device of said local computer;

10 receiving input data from a user of said local computer to said chat interface, said input data providing an outgoing chat message, wherein said outgoing chat message includes sent force information;

causing said outgoing chat message to be sent to a remote computer, said remote
computer connected to said local host computer via a network, wherein said remote computer
outputs a haptic sensation to a user of said remote computer based at least in part on said force
information;

15 receiving an incoming chat message from said remote computer to said chat interface;
and

displaying said incoming chat message on a display device to said user of said local
computer.

20 2. A method as recited in claim 1 wherein said remote computer displays a chat interface to said user of said remote computer.

3. A method as recited in claim 1 wherein said remote computer outputs said haptic
sensation using a haptic feedback interface device coupled to said remote computer.

25 4. A method as recited in claim 1 wherein said incoming chat message includes received force information, wherein said local computer outputs a haptic sensation to said user of said local computer, said haptic sensation based at least in part on said received force information.

5. A method as recited in claim 1 wherein said local computer and said remote computer are each coupled to a server machine via said network.

6. A method as recited in claim 4 wherein said chat interface includes a plurality of available haptic effects selectable by said user to be sent as said force information.

7. A method as recited in claim 4 wherein said force information is associated with sound information, such that said remote computer outputs a sound effect in coordination with said output of said haptic sensation.

8. A method as recited in claim 4 wherein said chat interface allows said user to create a custom haptic sensation to be referenced by said force information sent to said remote computer.

9. A method as recited in claim 4 wherein said chat interface includes a plurality of buttons, each of said buttons associated with a particular haptic sensation, wherein said user can send said force information causing a particular haptic sensation by selecting said button associated with said particular haptic sensation.

10. A method as recited in claim 4 wherein said force information is sent only to a subset of a plurality of users in a chat session, said subset of users selected by said user on said local computer.

11. A method as recited in claim 10 wherein a plurality of buttons included in said chat interface include a set of whisper buttons, which send said force information to only said subset of users selected by said user on said local computer.

12. A method as recited in claim 1 wherein said force information includes a command, said command being recognized by a chat interface on said remote computer to instruct said output of a force sensation to said haptic device coupled to said remote computer.

13. A method as recited in claim 1 wherein said force information includes a network address, said address being used by a chat interface on said remote computer as a network location at which to retrieve additional force information required to output a force sensation to said haptic device coupled to said remote computer.

14. A method as recited in claim 13 wherein said network address is an address of a web server storing a library of standard and customized haptic sensations which can be output by said haptic device.

15. A method as recited in claim 13 further comprising uploading custom force information to a server at said network address, wherein said uploaded custom force information can be downloaded by said remote computer to output a haptic sensation based on said custom force information.

16. A method as recited in claim 1 wherein said force information specifies a particular haptic sensation to be output and includes data characterizing said particular haptic sensation.

17. A method as recited in claim 1 wherein said chat interface allows said user of said local computer to type a text command to cause said force information to be sent to said remote computer.

18. A method for providing a chat interface running on a local computer, the chat interface capable of communicating with other client computers in a chat session, the method comprising:

providing said chat interface running on said local computer;

receiving input data from a user of said local computer to said chat interface, said input data providing an outgoing chat message;

causing said outgoing chat message to be sent to a remote computer, said remote computer connected to said local host computer via a network;

receiving an incoming chat message from said remote computer to said chat interface;

outputting said incoming chat message to said user of said local computer; and

outputting a haptic sensation to said user of said local computer using a haptic device coupled to said local computer, said haptic sensation based at least in part on said received chat message received from said remote computer.

19. A method as recited in claim 18 wherein said incoming chat message includes received force information, and wherein said haptic sensation is based at least in part on said received force information, and wherein said outgoing chat message includes sent force information.

20. A method as recited in claim 19 wherein said local computer displays said chat interface on a display device, and wherein said remote computer displays a remote chat interface to a user of said remote computer, wherein said remote computer outputs a haptic sensation to said user of said remote computer based at least in part on said sent force information received from said local computer.

21. A method as recited in claim 20 wherein said remote computer outputs said haptic sensation using a haptic feedback interface device coupled to said remote computer.

22. A method as recited in claim 18 wherein said local computer and said remote computer are each coupled to a server machine via said network.

23. A method as recited in claim 18 wherein said incoming chat message includes a network address, said address being recognized by said chat interface running on said local computer as a location at which to retrieve additional force information required to output said haptic sensation to said user of said local computer.

24. A method as recited in claim 18 wherein said sent force information specifies a particular haptic sensation to be output and includes data characterizing said particular haptic sensation.

25. A method as recited in claim 22 wherein said server machine includes an Internet Relay Chat (IRC) server, and wherein said chat interface communications with said IRC server using standard IRC protocols.

26. A method as recited in claim 18 wherein said incoming chat message is associated with sound information, such that said local computer outputs a sound effect in coordination with said output of said haptic sensation.

27. A method as recited in claim 18 wherein said incoming chat message is associated with one or more displayed images, such that said local computer displays said one or more displayed images in coordination with said output of said haptic sensation.

28. A method as recited in claim 23 wherein said network address is an address of a web server storing a library of standard and customized haptic sensations which can be output by said haptic device.

29. A method as recited in claim 23 further comprising uploading custom force information to a server at said network address, wherein said uploaded custom force information can be downloaded by said remote computer to output a haptic sensation based on said custom force information.

30. A method as recited in claim 18 wherein said chat interface allows said user of said local computer to type a text force command to cause said sent force information to be sent to said remote computer.

31. A method as recited in claim 30 wherein said text force command is displayed in a chat interface of said remote computer and includes at least one delimiter character for indicating the nature of said text force command.

32. A method as recited in claim 30 wherein said text force command is displayed in said chat interface of said remote computer and is includes at least one text character of an emoticon.

33. A method as recited in claim 19 wherein said incoming chat message and said outgoing chat message include data describing text characters for display in said chat interfaces, wherein said sent and received force information is also provided as said data describing text characters.

34. A method as recited in claim 18 wherein said input data and said incoming chat message are provided as audio data causing an audio output.

35. A method as recited in claim 18 wherein said input data and said incoming chat message are provided as text characters displayed by a display device.

36. A method as recited in claim 34 wherein said incoming chat message is provided as a waveform that represents speech of said user of said remote computer.

37. A method as recited in claim 36 wherein said waveform is analyzed by said local computer, said analysis detecting content in said waveform which is associated with said haptic sensation output by said haptic device.

38. A method as recited in claim 37 wherein said content is indicative of one or more emotions in said chat message, and wherein said haptic sensation is associated with said one or more emotions.

39. A computer readable medium storing program instructions to be executed by a local computer to provide a chat interface displayed by said local computer, the chat interface capable of providing haptic messages to other client computers across a computer network, the program instructions performing the following steps:

causing a display of said chat interface on a display device of said local computer;

receiving input data from a user of said local computer to said chat interface, said input data providing an outgoing chat message;

causing said outgoing chat message to be sent to a remote computer, said remote computer connected to said local host computer via said computer network;

receiving an incoming message from said remote computer to said chat interface;

displaying said incoming chat message on a display device to said user of said local computer; and

outputting a haptic sensation to said user of said local computer using a haptic device coupled to said local computer, said haptic sensation based at least in part on said incoming chat message received from said remote computer.

40. A computer readable medium as recited in claim 39 wherein said outgoing chat message includes sent force information and wherein said incoming chat message includes received force information, and wherein said haptic sensation is based at least in part on said received force information received from said remote computer.

41. A computer readable medium as recited in claim 39 wherein said outgoing and incoming chat messages include data describing text characters.

42. A computer readable medium as recited in claim 41 wherein said sent and received force information is provided as text characters.

43. A computer readable medium as recited in claim 39 wherein said received force information is processed by a background application running on said local computer simultaneously with said chat interface, said background application controlling said outputting of said haptic sensation to said user by said haptic device.

44. A computer readable medium as recited in claim 39 wherein said received force information includes a network address, said address being recognized by said chat interface running on said local computer as a location at which to retrieve additional force information required to output said haptic sensation to said user of said local computer.

45. A computer readable medium as recited in claim 44 wherein said program instructions further perform a step of uploading custom force information to a server at said network address, wherein said uploaded custom force information can be downloaded by said remote computer to output a haptic sensation based on said custom force information.

ABSTRACT

5 A chat interface allowing a user to exchange haptic chat messages with other users in a chat session over a computer network. A chat interface can be displayed by a local computer and receives input data from a user of the local computer, such as text characters or speech input. The input data provides an outgoing chat message that can include sent force information. The outgoing chat message is sent to a remote computer that is connected to the local host computer via a computer network. The remote computer can display a chat interface and output a haptic
10 sensation to a user of the remote computer based at least in part on the force information in the outgoing chat message. An incoming message from the remote computer can also be received at the chat interface, which may also include received force information. The incoming chat message is displayed on a display device to the user of the local computer. A haptic sensation can be output to the user of the local computer using a haptic device coupled to the local
15 computer, where the haptic sensation is based at least in part on the received force information received from the remote computer.

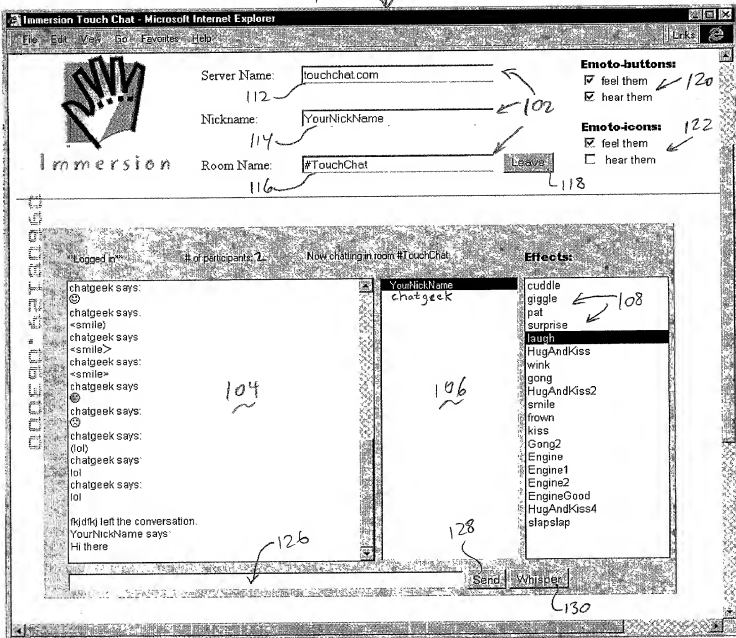


FIG. 3a

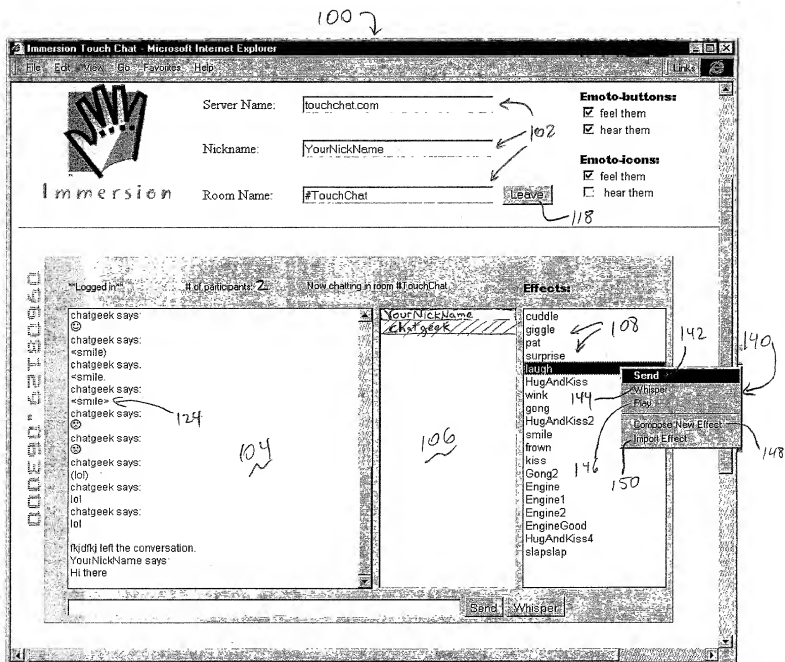


FIG. 3b

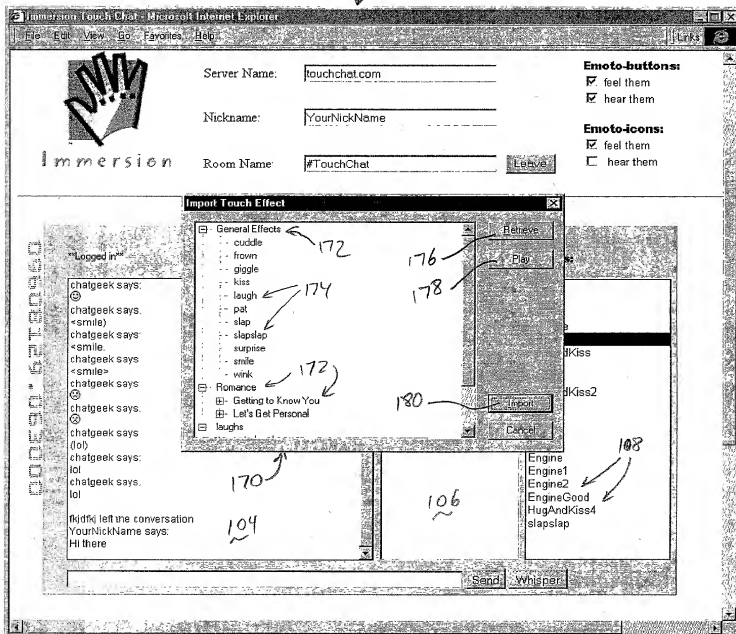


FIG. 3d

Immersion Touch Chat - Microsoft Internet Explorer

100

Server Name: 112

Username: 114

Room Name: 116

120

122

18

102

104

106

108

110

112

114

116

118

120

122

124

126

128

130

132

134

136

138

140

142

144

146

148

150

152

154

156

158

160

162

164

166

168

170

172

174

176

178

180

182

184

186

188

190

192

194

196

198

200

202

204

206

208

210

212

214

216

218

220

222

224

226

228

230

232

234

236

238

240

242

244

246

248

250

252

254

256

258

260

262

264

266

268

270

272

274

276

278

280

282

284

286

288

290

292

294

296

298

300

302

304

306

308

310

312

314

316

318

320

322

324

326

328

330

332

334

336

338

340

342

344

346

348

350

352

354

356

358

360

362

364

366

368

370

372

374

376

378

380

382

384

386

388

390

392

394

396

398

400

402

404

406

408

410

412

414

416

418

420

422

424

426

428

430

432

434

436

438

440

442

444

446

448

450

452

454

456

458

460

462

464

466

468

470

472

474

476

478

480

482

484

486

488

490

492

494

496

498

500

502

504

506

508

510

512

514

516

518

520

522

524

526

528

530

532

534

536

538

540

542

544

546

548

550

552

554

556

558

560

562

564

566

568

570

572

574

576

578

580

582

584

586

588

590

592

594

596

598

600

602

604

606

608

610

612

614

616

618

620

622

624

626

628

630

632

634

636

638

640

642

644

646

648

650

652

654

656

658

660

662

664

666

668

670

672

674

676

678

680

682

684

686

688

690

692

694

696

698

700

702

704

706

708

710

712

714

716

718

720

722

724

726

728

730

732

734

736

738

740

742

744

746

748

750

752

754

756

758

760

762

764

766

768

770

772

774

776

778

780

782

784

786

788

790

792

794

796

798

800

802

804

806

808

810

812

814

816

818

820

822

824

826

828

830

832

834

836

838

840

842

844

846

848

850

852

854

856

858

860

862

864

866

868

870

872

874

876

878

880

882

884

886

888

890

892

894

896

898

900

902

904

906

908

910

912

914

916

918

920

922

924

926

928

930

932

934

936

938

940

942

944

946

948

950

952

954

956

958

960

962

964

966

968

970

972

974

976

978

980

982

984

986

988

990

992

994

996

998

1000

1002

1004

1006

1008

1010

1012

1014

1016

1018

1020

1022

1024

1026

1028

1030

1032

1034

1036

1038

1040

1042

1044

1046

1048

1050

1052

1054

1056

1058

1060

1062

1064

1066

1068

1070

1072

1074

1076

1078

1080

1082

1084

1086

1088

1090

1092

1094

1096

1098

1100

1102

1104

1106

1108

1110

1112

1114

1116

1118

1120

1122

1124

1126

1128

1130

1132

1134

1136

1138

1140

1142

1144

1146

1148

1150

1152

1154

1156

1158

1160

1162

1164

1166

1168

1170

1172

1174

1176

1178

1180

1182

1184

1186

1188

1190

1192

1194

1196

1198

1200

1202

1204

1206

1208

1210

1212

1214

1216

1218

1220

1222

1224

1226

1228

1230

1232

1234

1236

1238

1240

1242

1244

1246

1248

1250

1252

1254

1256

1258

1260

1262

1264

1266

1268

1270

1272

1274

1276

1278

1280

1282

1284

1286

1288

1290

1292

1294

1296

1298

1300

1302

1304

1306

1308

1310

1312

1314

1316

1318

1320

1322

1324

1326

1328

1330

1332

1334

1336

1338

1340

1342

1344

1346

1348

1350

1352

1354

1356

1358

1360

1362

1364

1366

1368

1370

1372

1374

1376

1378

1380

1382

1384

1386

1388

1390

1392

1394

1396

1398

1400

1402

1404

1406

1408

1410

1412

1414

1416

1418

1420

1422

1424

1426

1428

1430

1432

1434

1436

1438

1440

1442

1444

1446

1448

1450

1452

1454

1456

1458

1460

1462

1464

1466

1468

1470

1472

1474

1476

1478

1480

1482

1484

1486

1488

1490

1492

1494

1496

1498

1500

1502

1504

1506

1508

1510

1512

1514

1516

1518

1520

1522

1524

1526

1528

1530

1532

1534

1536

1538

1540

1542

1544

1546

1548

1550

1552

1554

1556

1558

1560

1562

1564

1566

1568

1570

1572

1574

1576

1578

1580

1582

1584

1586

1588

1590

1592

1594

1596

1598

1600

1602

1604

1606

1608

1610

1612

1614

1616

1618

1620

1622

1624

1626

1628

1630

1632

1634

1636

1638

1640

1642

1644

1646

1648

1650

1652

1654

1656

1658

1660

1662

1664

1666

1668

1670

1672

1674

1676

1678

1680

1682

1684

1686

1688

1690

1692

1694

1696

1698

1700

1702

1704

1706

1708

1710

1712

1714

1716

1718

1720

1722

1724

1726

1728

1730

1732

1734

1736

1738

1740

1742

1744

1746

1748

1750

1752

1754

1756

1758

1760

1762

1764

1766

1768

1770

1772

1774

1776

1778

1780

1782

1784

1786

1788

1790

1792

1794

1796

1798

1800

1802

1804

1806

1808

1810

1812

1814

1816

1818

1820

1822

1824

1826

1828

1830

1832

1834

1836

1838

1840

1842

1844

1846

1848

1850

1852

1854

1856

1858

1860

1862

1864

1866

1868

1870

1872

1874

1876

1878

1880

1882

1884

1886

1888

1890

1892

1894

1896

1898

1900

1902

1904

1906

1908

1910

1912

1914

1916

1918

1920

1922

1924

1926

1928

1930

1932

1934

1936

1938

1940

1942

1944

1946

1948

1950

1952

1954

1956

1958

1960

1962

1964

1966

1968

1970

1972

1974

1976

1978

1980

1982

1984

1986

1988

1990

1992

1994

1996

1998

2000

2002

2004

2006

2008

2010

2012

2014

2016

2018

2020

2022

2024

2026

2028

2030

2032

2034

2036

2038

2040

2042

2044

2046

2048

2050

2052

2054

2056

2058

2060

2062

2064

2066

2068

2070

2072

2074

2076

2078

2080

2082

2084

2086

2088

2090

2092

2094

2096

2098

2100

2102

2104

2106

2108

2110

2112

2114

2116

2118

2120

2122

2124

2126

2128

2130

2132

2134

2136

2138

2140

2142

2144

2146

2148

2150

2152

2154

2156

2158

2160

2162

2164

2166

2168

2170

2172

2174

2176

2178

2180

2182

2184

2186

2188

2190

2192

2194

2196

2198

2200

2202

2204

2206

2208

2210

2212

2214

2216

2218

2220

2222

2224

2226

2228

2230

2232

2234

2236

2238

2240

2242

2244

2246

2248

2250

2252

2254

2256

2258

2260

2262

2264

2266

2268

2270

2272

2274

2276

2278

2280

2282

2284

2286

2288

2290

2292

2294

2296

2298

2300

2302

2304

2306

2308

2310

2312

2314

2316

2318

2320

2322

2324

2326

2328

2330

2332

2334

2336

2338

2340

2342

2344

2346

2348

2350

2352

2354

2356

2358

2360

2362

2364

2366

2368

2370

2372

2374

2376

2378

2380

2382

2384

2386

2388

2390

2392

2394

2396

2398

2400

2402

2404

2406

2408

2410

2412

2414

2416

2418

2420

2422

2424

2426

2428

2430

2432

2434

2436

2438

2440

2442

2444

2446

2448

2450

2452

2454

2456

2458

2460

2462

2464

2466

2468

2470

2472

2474

2476

2478

2480

2482

2484

2486

2488

2490

2492

2494

2496

2498

2500

2502

2504

2506

2508

2510

2512

2514

2516

2518

2520

2522

2524

2526

2528

2530

2532

2534

2536

2538

2540

2542

2544

2546

2548

2550

2552

2554

2556

2558

2560

2562

2564

2566

2568

2570

2572

2574

2576

2578

2580

2582

2584

2586

2588

2590

2592

2594

2596

2598

2600

2602

2604

2606

2608

2610

2612

2614

2616

2618

2620

2622

2624

2626

2628

DECLARATION AND POWER OF ATTORNEY FOR ORIGINAL U.S. PATENT APPLICATION

Attorney's Docket No. IMM1P104

As below-named inventor, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our names.

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled, CHAT INTERFACE WITH HAPTIC FEEDBACK FUNCTIONALITY, the specification of which,

(check one)

1. ☒ is attached hereto.

2. ☐ was filed on _____ as
U.S. Application No. _____
and was amended _____.

3. ☐ was filed on _____ as
International PCT Application Serial No. _____
and was amended on _____.

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, CFR §1.56.

We hereby claim foreign priority benefits under Title 35, United States code, § 119 of any foreign application(s) for patent or inventors' certificate listed below and have also identified below any foreign application for patent or inventors' certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Benefits Claimed?

_____	_____	_____	__ Yes __ No
(Appl. No.)	(Country)	(Date Filed- Day/Month/Year)	

_____	_____	_____	__ Yes __ No
(Appl. No.)	(Country)	(Date Filed- Day/Month/Year)	

We hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this applications is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s)

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status - patented, pending, abandoned)

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status - patented, pending, abandoned)

And I hereby appoint James R. Riegel (Reg. No. 36,651) and the law firm of Hickman Stephens Coleman & Hughes, including Paul L. Hickman (Reg. No. 28,516); L. Keith Stephens (Reg. No. 32,632); Brian R. Coleman (Reg. No. 39,145); Michael E. Melton (Reg. No. 32,276); Jerry Wei (Reg. No. 43,247); Robert D. Hayden (Reg. No. 42,645); Kevin J. Zilka (Reg. No. 41,429); and Dominic M. Kotab (Reg. No. 42,762) as my principle attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Send Correspondence To:

Paul L. Hickman
HICKMAN STEPHENS COLEMAN & HUGHES, LLP
P.O. BOX 52037
Palo Alto, California 94303-0746

Direct Telephone Calls To:

James R. Riegel at telephone number (408) 467-1900

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Typewritten Full Name of

Sole or First Inventor: Evan F. Wies

Citizenship: USA

Inventor's signature: Evan Wies

Date of Signature: 8-Jun-2006

Residence: (City) Mountain View

(State/Country) CA, USA

Post Office Address: 1005 Villa St., Mountain View, CA 94041

* Typewritten Full Name of

Second Inventor: Dean C. Chang

Citizenship: USA

Inventor's signature: Dean Chang

Date of Signature: 6/26/06

Residence: (City) Santa Clara

(State/Country) CA, USA

Post Office Address: 2885 Stevenson St., Santa Clara, CA 95051

Typewritten Full Name of

Third Inventor: Michael P. Ruf

Citizenship: USA

Inventor's signature: Michael P. Ruf

Date of Signature: 7-Jun-2000

Residence: (City) Parkland

(State/Country) FL, USA

Post Office Address: 7420 Dover Lane, Parkland, FL 33067